




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/24, H04L 12/64, 29/06	A1	(11) International Publication Number: WO 99/46937 (43) International Publication Date: 16 September 1999 (16.09.99)
(21) International Application Number: PCT/US99/04793 (22) International Filing Date: 5 March 1999 (05.03.99) (30) Priority Data: 90/037,397 9 March 1998 (09.03.98) US (71) Applicant (for all designated States except US): SONY ELECTRONICS, INC. [US/US]; 1 Sony Drive, Park Ridge, NJ 07656 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): LYM, Kevin [US/US]; 108 Hudson Bay, Alameda, CA 94502 (US). SHIMA, Hisato [JP/US]; 915 Inverness Way, Sunnyvale, CA 94087 (US). VU, Quan [US/US]; 2200 Skyline Drive, Milpitas, CA 95035 (US). (74) Agents: HAVERSTOCK, Thomas, B. et al.; Haverstock & Owens LLP, Suite 420, 260 Sheridan Avenue, Palo Alto, CA 94306 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: APPARATUS AND METHOD FOR PREDICTIVE TIME STAMPING OF ISOCHRONOUS DATA PACKETS

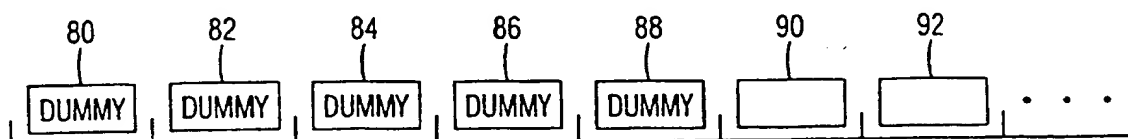

(57) Abstract

In order to predictively time stamp isochronous data packets transmitted over an IEEE 1394-1995 serial bus network, an application, which is to send a stream of isochronous data packets to a receiving node, first transmits a number of dummy frames each consisting of a number of packets. Preferably, these isochronous data packets make up frames of video data. From these dummy packets, the application obtains the time stamp values within the common isochronous packet (CIP) header of each packet. Using these obtained time stamp values, the application calculates a presentation time value for each data frame to be transmitted. The obtained time stamp value from a transmitted video frame is used to calculate the presentation time for a video frame which is a number of frames ahead within the transmit queue. Once the presentation time value for a frame is calculated, that value is then inserted by the application into the CIP header for the first packet within that frame and the frame is sent to the transmit queue for transmission to the receiving node over the IEEE 1394-1995 serial bus network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

APPARATUS AND METHOD FOR PREDICTIVE TIME STAMPING OF ISOCRONOUS DATA PACKETS

5 FIELD OF THE INVENTION:

The present invention relates to the field of transmitting information between devices. More particularly, the present invention relates to the field of transmitting time sensitive information between devices over an IEEE 1394-1995 serial bus network.

10 BACKGROUND OF THE INVENTION:

The IEEE 1394-1995 standard, "1394-1995 Standard For A High Performance Serial Bus," is an international standard for implementing an inexpensive high-speed serial bus architecture which supports both asynchronous and isochronous format data transfers. Isochronous data transfers are real-time transfers which take place such that the time intervals between significant instances have the same duration at both the transmitting and receiving applications. Each packet of data transferred isochronously is transferred in its own time period. An example of an ideal application for the transfer of data isochronously would be from a video recorder to a television set. The video recorder records images and sounds and saves the data in discrete chunks or packets. The video recorder then transfers each packet, representing the image and sound recorded over a limited time period, during that time period, for display by the television set. The IEEE 1394-1995 standard bus architecture provides multiple channels for isochronous data transfer between applications. A six bit channel number is broadcast with the data to ensure reception by the appropriate application. This allows multiple applications to concurrently transmit isochronous data across the bus structure. Asynchronous transfers are traditional data transfer operations which take place as soon as possible and transfer an amount of data from a source to a destination.

The IEEE 1394-1995 standard provides a high-speed serial bus for interconnecting digital devices thereby providing a universal I/O connection. The IEEE 1394-1995 standard defines a digital interface for the applications thereby eliminating the need for an application to convert digital data to analog data before it is transmitted across the bus. Correspondingly, a receiving application will receive digital data from the bus, not analog

data, and will therefore not be required to convert analog data to digital data. The cable required by the IEEE 1394-1995 standard is very thin in size compared to other bulkier cables used to connect such devices. Devices can be added and removed from an IEEE 1394-1995 bus while the bus is active. If a device is so added or removed the bus will then automatically reconfigure itself for transmitting data between the then existing nodes. A node is considered a logical entity with a unique address on the bus structure. Each node provides an identification ROM, a standardized set of control registers and its own address space.

The IEEE 1394-1995 cable environment is a network of nodes connected by point-to-point links, including a port on each node's physical connection and the cable between them. The physical topology for the cable environment of an IEEE 1394-1995 serial bus is a non-cyclic network of multiple ports, with finite branches. The primary restriction on the cable environment is that nodes must be connected together without forming any closed loops.

The IEEE 1394-1995 cables connect ports together on different nodes. Each port includes terminators, transceivers and simple logic. A node can have multiple ports at its physical connection. The cable and ports act as bus repeaters between the nodes to simulate a single logical bus. The cable physical connection at each node includes one or more ports, arbitration logic, a resynchronizer and an encoder. Each of the ports provide the cable media interface into which the cable connector is connected. The arbitration logic provides access to the bus for the node. The resynchronizer takes received data-strobe encoded data bits and generates data bits synchronized to a local clock for use by the applications within the node. The encoder takes either data being transmitted by the node or data received by the resynchronizer, which is addressed to another node, and encodes it in data-strobe format for transmission across the IEEE 1394-1995 serial bus. Using these components, the cable physical connection translates the physical point-to-point topology of the cable environment into a virtual broadcast bus, which is expected by higher layers of the system. This is accomplished by taking all data received on one port of the physical connection, resynchronizing the data to a local clock and repeating the data out of all of the other ports from the physical connection.

When transmitting isochronous data between two devices, each packet of isochronous data is time-stamped with the current bus time of the cycle in which the packet

is transmitted. If not received by the receiving device in the correct cycle, the packet is typically discarded by the receiving device and the data is lost. This is especially true when transmitting video data which is very time sensitive. When transmitting frames of video data, the first packet of the received frames of data have to be received within a
5 recognized boundary of time as compared to the time stamp value of the packet. If the first packet of the frame is received outside of this boundary, the entire frame is generally discarded and not processed by the receiving device.

The value of this time stamp is acquired from the cycle time register, within the transmitting device, which maintains the current bus time for a node. The cycle time
10 register includes a second_count field and a cycle_count field which together form a value representing the current cycle. This cycle value is incremented on each carry from a cycle_offset field. The cycle_offset field is updated on each transition of the system clock. On the transition after the value within the cycle_offset field is equal to 3071, the value within this field wraps around to zero and the value within the cycle_count field is
15 incremented. The value within the cycle_offset field is a fractional part of the current isochronous cycle. When transmitting data from an application within the node, the application must obtain the current bus time from the cycle time register, then load the current bus time value into the packet and transmit the packet over the IEEE 1394-1995 serial bus to the receiving node. Within the transmitting node, there can be a substantial
20 delay between the time in which the current bus time value is sent from the cycle time register and the time at which the application receives the current bus time value from the cycle time register, inserts it into the packet and actually transmits the packet over the IEEE 1394-1995 serial bus network. If this delay is significant, the current bus time value received by the application may be obsolete and outside of the appropriate boundary of
25 time, by the time the packet is actually transmitted, causing the transmitted packets to be discarded by the receiving device.

What is needed is a method of and apparatus for ensuring that transmitted packets will be received by the receiving device within the appropriate boundary of time in order that the packets are properly processed by the receiving device and not discarded. What is
30 further needed is a method of and apparatus for predicting the current bus time value corresponding to the actual transmission of isochronous packets from a node on an IEEE 1394-1995 serial bus.

SUMMARY OF THE INVENTION:

In order to predictively time stamp isochronous data packets transmitted over an IEEE 1394-1995 serial bus network, an application, which is to send a stream of isochronous data packets to a receiving node, first transmits a number of dummy frames each consisting of a number of packets. Preferably, these isochronous data packets make up frames of video data. From these dummy packets, the application obtains the time stamp values within the common isochronous packet (CIP) header of each packet. Using these obtained time stamp values, the application calculates a presentation time value for each data frame to be transmitted. The obtained time stamp value from a transmitted video frame is used to calculate the presentation time for a video frame which is a number of frames ahead within the transmit queue. Once the presentation time value for a frame is calculated, that value is then inserted by the application into the CIP header for the first packet within that frame and the frame is sent to the transmit queue for transmission to the receiving node over the IEEE 1394-1995 serial bus network.

BRIEF DESCRIPTION OF THE DRAWINGS:

Figure 1 illustrates a block diagram of an IEEE 1394-1995 serial bus network including a computer system and a video camera.

Figure 2 illustrates a block diagram of the internal components of the computer system 10.

Figure 3 illustrates a format of an isochronous data packet for transmission over an IEEE 1394-1995 serial bus network.

Figure 4 illustrates a format of a CIP header field within an isochronous data packet.

Figure 5 illustrates a flow diagram of the steps involved in predictively time stamping isochronous data frames according to the preferred embodiment of the present invention.

Figure 6 illustrates the transmission of a stream of isochronous video frames including a number of dummy frames preceding the actual video frames.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:

A block diagram of an exemplary IEEE 1394-1995 serial bus network including a computer system and a video camera is illustrated in Figure 1. The computer system 10 includes an associated display 12 and is coupled to the video camera 14 by the IEEE 1394-1995 serial bus cable 16. Video data and associated data are sent between the video camera 14 and the computer 10 over the IEEE 1394-1995 serial bus cable 16.

A block diagram of the internal components of the computer system 14 is illustrated in Figure 2. The computer system 10 includes a central processor unit (CPU) 20, a main memory 30, a video memory 22, a mass storage device 32 and an IEEE 1394-1995 interface circuit 28, all coupled together by a conventional bidirectional system bus 34. The interface circuit 28 includes the physical interface circuit 42 for sending and receiving communications on the IEEE 1394-1995 serial bus. The physical interface circuit 42 is coupled to the camera 14 over the IEEE 1394-1995 serial bus cable 16. In the preferred embodiment of the present invention, the interface circuit 28 is implemented on an IEEE 1394-1995 interface card within the computer system 10. However, it should be apparent to those skilled in the art that the interface circuit 28 can be implemented within the computer system 10 in any other appropriate manner, including building the interface circuit onto the motherboard itself. The mass storage device 32 may include both fixed and removable media using any one or more of magnetic, optical or magneto-optical storage technology or any other available mass storage technology. The system bus 34 contains an address bus for addressing any portion of the memory 22 and 30. The system bus 34 also includes a data bus for transferring data between and among the CPU 20, the main memory 30, the video memory 22, the mass storage device 32 and the interface circuit 28.

The computer system 10 is also coupled to a number of peripheral input and output devices including the keyboard 38, the mouse 40 and the associated display 12. The keyboard 38 is coupled to the CPU 20 for allowing a user to input data and control commands into the computer system 10. A conventional mouse 40 is coupled to the keyboard 38 for manipulating graphic images on the display 12 as a cursor control device.

A port of the video memory 22 is coupled to a video multiplex and shifter circuit 24, which in turn is coupled to a video amplifier 26. The video amplifier 26 drives the display 12. The video multiplex and shifter circuitry 24 and the video amplifier 26 convert

pixel data stored in the video memory 22 to raster signals suitable for use by the display 12.

A format of an isochronous data packet for transmission over an IEEE 1394-1995 serial bus network is illustrated in Figure 3. The format of the data packet also complies with the IEC 1883 standard. The data_length field contains a value representing the number of bytes of data within the data field, including the number of bytes within the CIP header. The channel field contains the channel number on which the isochronous packet is transmitted. The tCode field contains the transaction code for the packet. For isochronous data packets, the tCode field contains either a value of Ah or Ch. The sy field contains a synchronization flag used in some applications to synchronize the data in the current isochronous packet with some application specific event. The sourceID field contains a six bit value representing the physical identifying code of the node which is transmitting the packet. The values in the other CIP header fields depend on the format of the data being transmitted in the packet. The data field, if present, contains the content data being transmitted in the packet.

A format of the CIP header within an isochronous data packet is illustrated in Figure 4. Within the CIP header, the SID field contains the source node ID value of the transmitting node. The DBS field contains a value representing the size of the data block in quadlets. The FN field contains a fraction number representing the number of data blocks into which a source packet is divided. The QPC field contains a value representing the number of dummy quadlets added to a source packet to equalize the size of the divided data blocks. If the FN field indicates that the source packet is not divided, then the QPC field will contain a value equal to zero. The SPH flag represents whether or not the source packet includes a source packet header. The SPH flag is set equal to a logical "one" when the source packet does include a source packet header. The rsv field is reserved for future extension. The DBC field is the continuity counter of data blocks to detect a loss of data blocks. The FMT field includes a format identifier which identifies the format of the packet. The FDF field is a format dependent field and depends on the format of the packet. The SYT field is used to synchronize the transmitter and the receiver.

When transmitting isochronous data over an IEEE 1394-1995 serial bus network, the SYT field includes a time stamp value for the presentation time of the frame. The receiving node uses this time stamp value to ensure that the data is presented within the

correct boundary of time for video data. As discussed above, if the frame does not fall within the correct boundary of time, the receiving device will discard the entire frame.

In order to ensure that the transmitted data includes the appropriate time stamp value, the application of the present invention calculates the time stamp value by first sending a number of dummy data frames. A data frame consists of a number of isochronous packets. The number of isochronous packets per frame is dependent upon the type of data being sent. In terms of video, a data frame can be a single frame of digital video. After the first data frame is sent, a time stamp of the last packet sent of the first frame is obtained. From this value, a new time stamp value or presentation time is calculated for the first packet of a video frame which is a number of frames ahead of the frame from which the time stamp value was obtained. In the preferred embodiment of the present invention, the presentation time is calculated for a video frame which is four frames, or one less than the preferred number of dummy frames, ahead of the frame from which the time stamp value was obtained. Once calculated, this presentation time value is written into the SYT field of the CIP header of the first packet within the appropriate data frame and sent to the transmit queue for transmission over the IEEE 1394-1995 serial bus to the receiving node.

A flow diagram of the steps involved in predictively time stamping isochronous data frames according to the preferred embodiment of the present invention, is illustrated in Figure 5. The flow chart is entered at the step 50, when an application within the computer 10 is preparing to transmit a stream of isochronous data to the video camera 14. At the step 52, the application attaches the dummy data frames to the isochronous transmit queue. Each dummy data frame consists of a number of dummy IEEE 1394-1995 isochronous packets. The number of dummy packets per data frame is determined by the type of data being sent. At the step 54, the application starts to transmit the dummy frames from the computer 10, over the IEEE 1394-1995 serial bus network 16 to the video camera 14. In the preferred embodiment of the present invention five dummy data frames are sent before actual data frames containing actual video data are transmitted to the receiving device. Alternatively, any appropriate number of dummy data frames can be transmitted by the application. At the step 56, the application waits until it receives notification that a dummy data frame has been sent.

After the first data frame is sent, the application obtains the time stamp value of the last packet in this data frame from the IEEE 1394-1995 interface circuit. From this time stamp value, the presentation time for the first real packet within the first actual data frame is calculated at the step 58. The first actual data frame will be the sixth frame to be sent and will be transmitted after the five dummy data frames. This presentation time value is calculated using the following equation:

$$\text{PresentationTime} = ((\# \text{ of Dummy Frames} - 1) * \text{DataFrameXmtTimeLength}) + \text{TimeStamp} + \text{PresentationTimeFactor}$$

The DataFrameXmtTimeLength value represents the time length of each data frame that is transmitted and is calculated by multiplying the number of isochronous packets per data frame by the isochronous transmission time per packet. The isochronous transmission time per packet is a fixed value per packet as described in the IEEE 1394-1995 specification. The DataFrameXmtTimeLength value is multiplied by a value equal to one less than the number of dummy data frames being sent, in order to add an appropriate time value representing the number of transmitted frames between the frame from which the time stamp value was obtained and the frame for which the presentation time is being calculated. The TimeStamp value is the time stamp value retrieved from the transmission of a previous packet within a data frame. For the first actual video frame, the TimeStamp value is equal to the cycle time of the last isochronous packet sent in the first dummy frame. Within the preferred embodiment of the present invention, only the cycle count value from the cycle time of the last isochronous packet sent in the first dummy frame is used as the TimeStamp value. The cycle offset value within the cycle time of the last isochronous packet sent in the first dummy frame is not used because only the cycle that the packet is sent is needed to calculate the presentation time of the packet. The offset time within the cycle is not necessary to calculate the presentation time. It should however be apparent to those skilled in the art that the value of the entire cycle time could alternately be used as the TimeStamp value. The PresentationTimeFactor is a factor in units of isochronous cycles which is used to change the time stamp value into an appropriate presentation time. The value of the PresentationTimeFactor is dependent on

the specific implementation and will vary due to system implementation and performance characteristics. The PresentationTimeFactor value is composed of two components and is calculated using the following equation:

5 PresentationTimeFactor= tdiff + TransmissionDelayLimit

The tdiff value represents the difference between the actual cycle time when a packet is transmitted and the cycle time that the hardware actually reports that the packet has been transmitted. The delay between the actual cycle time when a packet is transmitted and the cycle time that the hardware actually reports that the packet has been transmitted is determined by the specific hardware implementation. If the hardware supports returning the actual time that the packet was transmitted, then the tdiff value is equal to zero. The TransmissionDelayLimit value is equal to the maximum number of cycles allowed for a packet to be transmitted by the audio/video device. This value is described in the "Specifications of Consumer-Use Digital VCRs" for specific hardware devices. Preferably, this value is equal to 450 microseconds or three cycles.

Once the presentation time is calculated for a data frame, this data frame can be time stamped. At the step 60, the presentation time value is written into the SYT field of the first isochronous data packet contained within the data frame. At the step 62 the data frame is then attached to the transmit queue for transmission over the IEEE 1394-1995 serial bus network. It is then determined, at the step 64, if there are more data frames within this stream of data to be transmitted. If there are more data frames to be transmitted, steps 56 through 62 are repeated for each frame to be transmitted in order to calculate an appropriate presentation time value for each frame from an obtained time stamp value from the transmitted frame which is four frames before the frame for which the presentation time value is being calculated. Once all frames are appropriately time stamped and attached to the transmit queue, the operation is finished at the step 66.

The transmission of a stream of isochronous frames including a number of dummy frames preceding the actual video frames is illustrated in Figure 6. The five dummy frames 80, 82, 84, 86 and 88 are transmitted successively before the actual video frames 90 and 92. From the five dummy frames 80, 82, 84, 86 and 88, the application calculates the presentation time values for the actual video frames within the data stream. As described

in detail above, the presentation time value for the actual frame 90 is calculated using the time stamp value obtained from the first dummy frame 80. Correspondingly, the presentation time value for the second actual frame 92 is calculated using the time stamp value obtained from the second dummy frame 82. Once the presentation time value for a frame is calculated, this presentation time value is written into the SYT field of the CIP header of the first packet within the frame. The remaining packets within the frame are time-stamped in a conventional manner with the current bus time of the cycle in which the frame is transmitted. Once the presentation time value for a frame is calculated and written into the SYT field of the CIP header, the frame is then added to the transmitting node's transmit queue for transmission over the IEEE 1394-1995 serial bus to the receiving node at the appropriate time.

This process is repeated for each data frame in the stream of data until all of the data frames within the stream of data have been transmitted from the computer 10 to the video camera 14. In this manner, by calculating the appropriate time stamp value for a frame and inserting that value into the SYT field of the CIP header of the first packet within the frame, the application ensures that when received by the video camera 14, the frames of video data will be properly processed and not discarded.

The preferred embodiment of the present invention is used to transmit isochronous data over an IEEE 1394-1995 serial bus network from a software application within a personal computer 10 to a video camera 14. However, it should be apparent to those skilled in the art that the present invention can be used to transmit time sensitive data frames and packets between any two appropriately configured applications and/or devices in order to ensure that when received, the time stamp value is appropriate for the cycle in which the frame or packet of data is transmitted. Within the preferred embodiment of the present invention, the time stamp value for an entire frame is calculated and written into the first packet of the frame. It should be apparent to those skilled in the art that the present invention can also be used to appropriately time stamp multiple individual packets whether or not they are part of a video frame.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be

apparent to those skilled in the art that modifications may be made in the embodiment chosen for illustration without departing from the spirit and scope of the invention.

C L A I M S

We Claim:

- 1 1. A method of calculating a time value for a frame of data to be transmitted
2 comprising the steps of:
 - 3 a. transmitting a previous frame a number of frames before the frame of data
4 to be transmitted;
 - 5 b. obtaining a time stamp value from the previous frame; and
 - 6 c. determining the time value using the time stamp value.
- 1 2. The method as claimed in claim 1 wherein the step of determining the time
2 value is completed by adding a value representing a time for transmission of the number of
3 frames to the time stamp value.
- 1 3. The method as claimed in claim 1 further comprising the step of inserting
2 the time value into the frame of data to be transmitted.
- 1 4. The method as claimed in claim 3 wherein the time value is inserted into a
2 first packet of the frame of data to be transmitted.
- 1 5. The method as claimed in claim 1 wherein the number of frames is equal to
2 four.
- 1 6. The method as claimed in claim 1 wherein the previous frame is a dummy
2 frame.
- 1 7. The method as claimed in claim 1 wherein the time value is a presentation
2 time value.
- 1 8. A method of transmitting a stream of data including a plurality of packets
2 comprising the steps of:

- 3 a. calculating a time value for a packet to be transmitted within the stream of
4 data by transmitting a previous packet, obtaining a time stamp value from
5 the previous packet and determining the time value using the time stamp
6 value; and
7 b. inserting the time value into the packet to be transmitted.

1 9. The method as claimed in claim 8 wherein the step of calculating a time
2 value is completed by adding the time stamp value of the previous packet to a value
3 representing a time of transmission for a number of packets between the previous packet
4 and the packet to be transmitted.

1 10. The method as claimed in claim 9 wherein the packet to be transmitted is
2 part of a video frame.

1 11. The method as claimed in claim 10 wherein the packet to be transmitted is a
2 first packet within the video frame.

1 12. A method of transmitting a stream of data including a plurality of packets
2 comprising the steps of:

- 3 a. transmitting one or more dummy packets from a transmitting node, wherein
4 each of the dummy packets has an associated time stamp value representing
5 a current time at which a corresponding dummy packet is transmitted;
6 b. calculating a time value for a packet to be transmitted after the dummy
7 packets using a time stamp value from a previously transmitted packet which
8 is a number of packets before the packet to be transmitted within the stream
9 of data;
10 c. inserting the time value into the packet to be transmitted; and
11 d. transmitting the packet to be transmitted from the transmitting node to a
12 receiving node.

1 13. The method as claimed in claim 12 wherein the packets within the stream of
2 data are grouped into one or more frames.

- 1 14. The method as claimed in claim 13 wherein the steps of b-d are repeated for
2 a first packet within each frame.
- 1 15. The method as claimed in claim 14 wherein the step of calculating a time
2 value is completed by adding a value representing a time for transmission of the number of
3 packets between the previously transmitted packet and the packet to be transmitted to the
4 time stamp value from the previously transmitted packet.
- 1 16. The method as claimed in claim 15 wherein the time value is a presentation
2 time value.
- 1 17. The method as claimed in claim 16 wherein the stream of data is
2 isochronous data.
- 1 18. The method as claimed in claim 17 wherein the transmitting node and a
2 receiving node are coupled together by an IEEE 1394-1995 serial bus network.
- 1 19. The method as claimed in claim 18 wherein the time value is inserted into
2 an SYT field within a CIP header of the packet.
- 1 20. An apparatus for transmitting a stream of data including a plurality of
2 packets comprising:
- 3 a. a transmitting circuit for transmitting a plurality of packets within the stream
4 of data from a transmitting node to a receiving node. wherein each of the
5 packets has an associated time stamp value representing a current time at
6 which the packet is transmitted; and
- 7 b. a control application for obtaining the time stamp value from a previous
8 packet. calculating a time value for a packet to be transmitted a number of
9 packets after the previous packet using the obtained time stamp value and
10 inserting the time value into the packet to be transmitted before the packet to
11 be transmitted is transmitted.

1 21. The apparatus as claimed in claim 20 wherein the transmitting circuit also
2 transmits the packet to be transmitted after the time value is inserted into the packet by the
3 control application.

1 22. The apparatus as claimed in claim 21 wherein the time value is a
2 presentation value and is calculated by adding a value representing a time for transmission
3 of the number of packets between the previous packet and the packet to be transmitted to
4 the obtained time stamp value.

1 23. The apparatus as claimed in claim 22 wherein the packets within the stream
2 of data are grouped into one or more frames.

1 24. The apparatus as claimed in claim 23 wherein the control application only
2 calculates the time value for a first packet of each frame.

1 25. The apparatus as claimed in claim 23 wherein the stream of data is
2 isochronous data.

1 26. The apparatus as claimed in claim 25 wherein the transmitting node and the
2 receiving node are coupled together by an IEEE 1394-1995 serial bus network.

1 27. The apparatus as claimed in claim 26 wherein the time value is inserted into
2 an SYT field within a CIP header of the packet to be transmitted.

1 28. A method of transmitting an isochronous stream of data from a transmitting
2 node to a receiving node over an IEEE 1394-1995 serial bus structure, the isochronous
3 stream of data including a plurality of packets grouped into one or more frames comprising
4 the steps of:

5 a. transmitting one or more dummy packets from the transmitting node to the
6 receiving node, wherein each of the dummy packets has an associated time
7 stamp value representing a current time at which a corresponding dummy
8 packet is transmitted;

- 9 b. calculating a time value for a packet to be transmitted after the dummy
10 packets using a time stamp value from a previously transmitted packet which
11 is a number of packets before the packet to be transmitted within the stream
12 of data:
13 c. inserting the time value into the packet to be transmitted;
14 d. transmitting the packet to be transmitted from the transmitting node to the
15 receiving node; and
16 e. repeating steps b-d for a first packet within each frame within the stream of
17 data.

1 29. The method as claimed in claim 28 wherein the step of calculating a time
2 value is completed by adding a value representing a time for transmission of the number of
3 packets between the previously transmitted packet and the packet to be transmitted to the
4 time stamp value from the previously transmitted packet.

1 30. The method as claimed in claim 29 wherein the time value is inserted into
2 an SYT field within a CIP header of the packet to be transmitted.

1/6

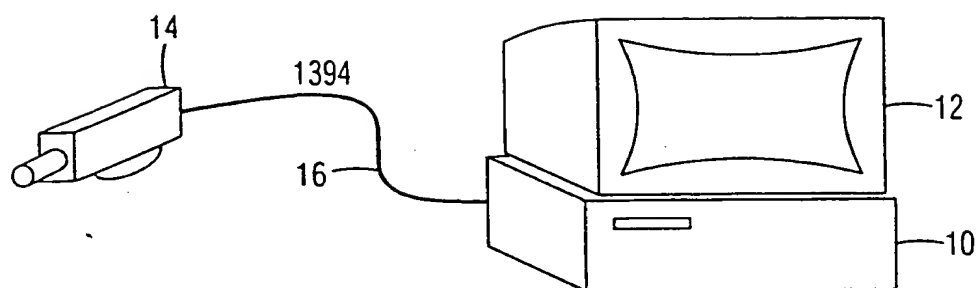


Fig. 1

2/6

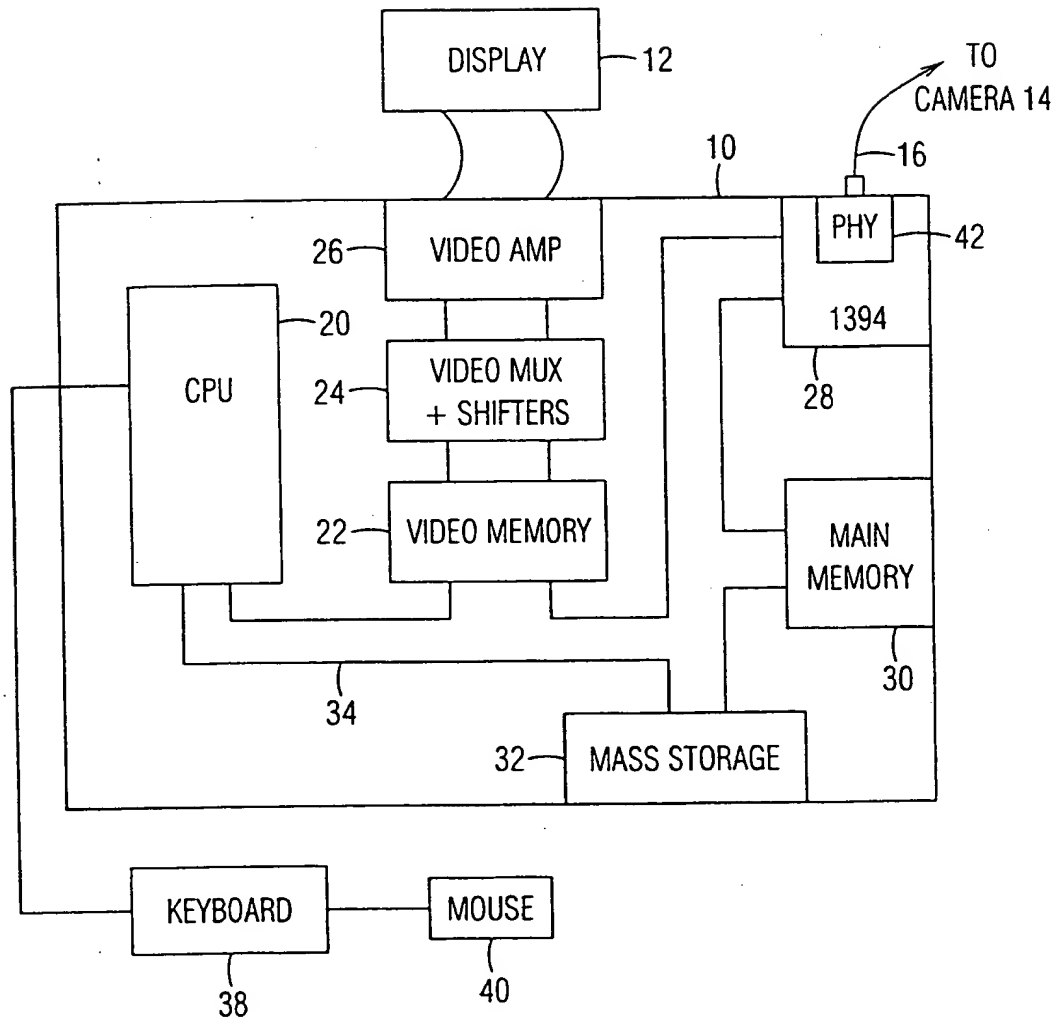


Fig. 2

3/6

data length	01	channel	tCode	sy
header_CRC				
	sourceID	other CIP header fields		
other CIP header fields				
remaining data field				
data_CRC				

Fig. 3

4/6

0	0	SID	DBS	FN	QPC	H/S	RSV	DBC
1	0	FMT	FDF	SYT				

Fig. 4

5/6

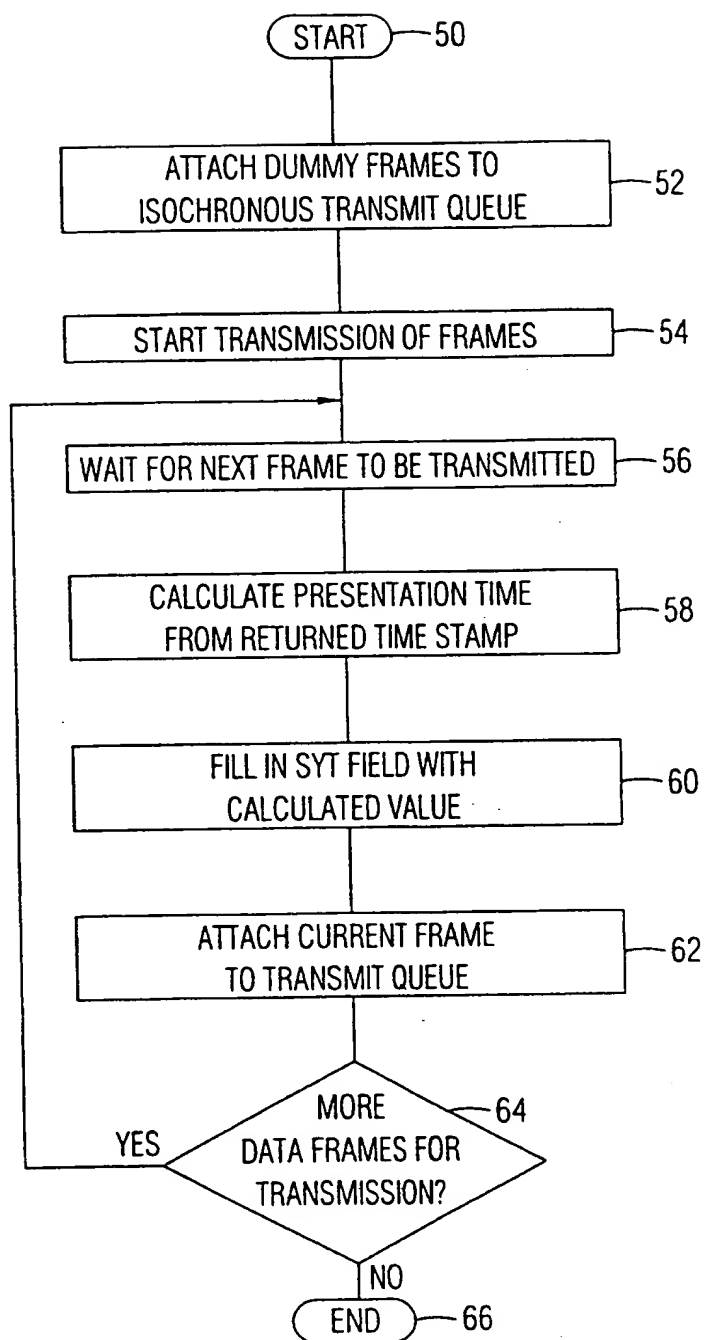


Fig. 5

6/6

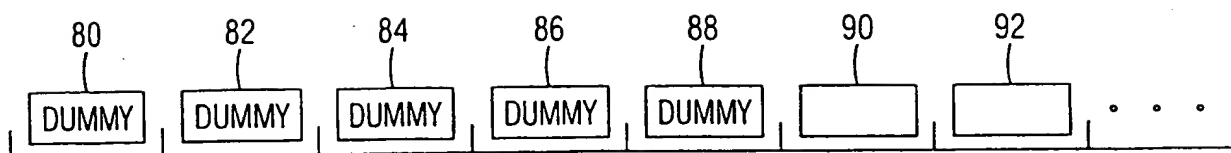


Fig. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/04793

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N7/24 H04L12/64 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BANKS D ET AL: "BREAKING OPEN THE SET TOP BOX" PROCEEDINGS OF THE SPIE, vol. 3228, 4 November 1997, pages 105-116, XP002064906	8-11, 20-23, 25, 26, 28, 29
A	see page 108, line 12 - line 16 see page 108, line 36 - page 109, line 1 see page 109, line 18 - line 22 see page 110, line 19 - line 23 see figure 4	1-7, 24
A	BLOKS R H J: "THE IEEE-1394 HIGH SPEED SERIAL BUS" PHILIPS JOURNAL OF RESEARCH, vol. 50, no. 1/02, 1 July 1996, pages 209-216, XP000627671 see page 211, line 1 - page 215, line 14 --- -/--	19, 27, 30



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 July 1999

Date of mailing of the international search report

19/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Carnerero Álvaro, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/04793

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KUNZMAN A J ET AL: "1394 HIGH PERFORMANCE SERIAL BUS: THE DIGITAL INTERFACE FOR ATV" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 41, no. 3, 1 August 1995, pages 893-900, XP000539552 see page 896, left-hand column - page 900, left-hand column	19,27,30
A	MONTGOMERY W A: "TECHNIQUES FOR PACKET VOICE SYNCHRONIZATION" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, vol. SAC-01, no. 6, 1 December 1983, pages 1022-1028, XP000563228 see page 1024 - page 1026	12-18